



Porta tagliafuoco serie Bloxall con finitura speciale NERO SPECCHIATO
Fire Glazing Door with rare NERO SPECCHIATO finishing.

CLASSI DI RESISTENZA
FIRE RESISTANCE

EI60

EI 60 class glazed firewall frame, constructed with 20/10 steel tubular bearing frame, Protected on the two sides by sheets of cement based silicate, asbestos free, fixed mechanically to the structure. Coplanar extruded aluminium covering profiles, alloy to UNI 3569 TA 16 standard, drawn in a manner to create a rabbet between the fixed and mobile frames, and housings for the cold smoke and heat expansion seals. Total frame thickness 70 mm. Made with or without central strip.

BLOXALL 70
ALLUMINIO
ALUMINIUM

Serramento tagliafuoco vetrato EI 60, costruito con telaio portante in tubolare di acciaio 20/10, protetto su due facce con lastre a base di silicato a matrice cementizia esenti da amianto fissante meccanicamente alla struttura. Profili di copertura in estruso di alluminio complanare lega UNI 3569 TA16, opportunamente trafilati in modo da creare battuta tra telaio fisso e mobile e sedi di contenimento delle guarnizioni di tenuta fumi freddi e termo espandenti. Spessore totale serramento mm.70. Esecuzione con o senza fascia centrale.

HINGES

In steel with three adjustable wings welded to the structure, rotating on thrust bearings and with stainless steel pins.

LOCK

Self-locking, released by turning the handle.

DRUM

Nickel plated Yale type drum.

HANDLES

Stainless steel fire prevention handles.

CLOSING MECHANISM

Self-closing mechanism: aerial door closer.

CHAIN

Self-locking chain on the second wing, and visible closing adjuster only on two glazed wings.

GLASS

EXTRACLEAR PYROSTOP EI 60 mm.23.

CERNIERE

In acciaio a tre ali regolabili saldate alla struttura, con rotazione su cuscinetti reggispinta, perni in acciaio inox.

SERRATURA

Autobloccante, sganciabile con semplice rotazione della maniglia.

CILINDRO

Tipo Yale nichelato.

MANIGLIE

Antincendio in acciaio Inox.

CHIUSURA

Meccanismo di auto chiusura: chiudiporta aereo.

CATENACCIO

Autobloccante su anta secondaria e regolatore di chiusura a vista: solo se la vetrata è a due ante.

VETRO

EXTRACLEAR PYROSTOP EI 60 mm.23.

MODELLI
MODELS



A UNA ANTA
SINGLE LEAF




A DUE ANTE
DOUBLE LEAF



SCORREVOLI
SLIDING



SEZIONE 3D
3D SECTION

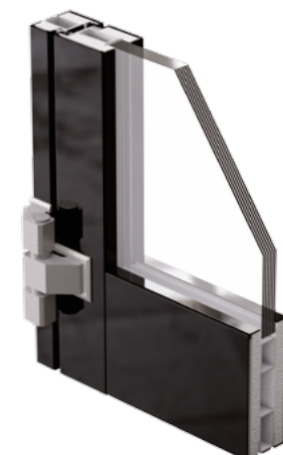

FINITURE CLASSICHE E SU RICHIESTA
CLASSIC FINISHES & FINISHES ON REQUEST

